



Journal of Applied and Computational Mechanics



Research Paper

A Dual Lagrange Multiplier Approach for the Dynamics of the Mechanical Systems

Naveed Anjum¹, Ji-Huan He²

¹ Department of Mathematics, Government College University, Faisalabad, Pakistan

² National Engineering Laboratory for Modern Silk, College of Textile and Engineering, Soochow University, Suzhou, China

Received January 29 2024; Revised March 13 2024; Accepted for publication March 27 2024.

Corresponding author: J.-H. He (hejihuan@suda.edu.cn)

© 2024 Published by Shahid Chamran University of Ahvaz

Abstract. The variational iteration method, a powerful tool for solving nonlinear oscillators with initial conditions, has been expanded to accommodate two-point boundary conditions. In this modification, two Lagrange multipliers are introduced, and their identification process mirrors that of the conventional approach. A generalized equation is provided for a category of highly nonlinear mechanical systems, followed by three illustrative examples derived from this generalized equation. These examples serve to demonstrate the effectiveness of the method. The solutions produced by this modified approach not only show remarkable agreement with numerical results but also exhibit superior accuracy when compared to outcomes obtained through other established methods.

Keywords: Amplitude-frequency relationship, Lagrange multiplier, variational principle, nonlinear conservative oscillator.

1. Introduction

Nonlinear oscillations, characterized by complex and often chaotic behaviors, have advanced applications across diverse scientific and engineering realms. From the intricate dynamics of biological systems and structural vibrations in engineering to the design of secure communication systems and the exploration of nonlinear effects in optics and lasers, the study of nonlinear oscillations contributes crucial insights for understanding, controlling, and innovating in complex dynamic systems across multiple disciplines [1-3]. Understanding the dynamics of nonlinear oscillations is essential because it provides insights into the complex behaviors exhibited by a wide range of dynamic systems. Unlike linear systems, where responses are directly proportional to inputs, nonlinear systems can display intricate phenomena such as chaos, bifurcations, and strange attractors. This understanding is crucial in various fields, including physics, engineering, biology, and control theory, enabling researchers and engineers to predict, control, and harness the behavior of complex systems. It facilitates advancements in fields like structural design, biological modeling, communication systems, and materials science, contributing to innovation and the development of more robust and efficient technologies.

Many effective methods have been proposed to solve nonlinear oscillatory problems, for example, the proximal policy optimization [4, 5], the multiple scale technique [6, 7], the variational approach [8-10], the homotopy perturbation method [11-14], Taylor series method [15], Adomian decomposition method [16] and so on. The energy balance method [17] and the frequency-formulation [18] are two other methods based on the variational principle and Nofel et al. [19] combined these two and found that this coupling gave superior results compared to those obtained by using the energy balance method alone, furthermore, Ma [20] suggested a modified frequency formulation based on the Hamilton principle.

The variational iteration method (VIM) was mainly introduced in 1998 [21] and has since been widely used to solve various nonlinear problems [22-27], as well as for fractal-fractional differential equations [28]. The method introduces a Lagrange multiplier to generate an appropriate correction iteration, called a correction functional. The optimal determination of this Lagrange multiplier is achieved through the application of the variational theory, which is an effective tool in engineering [29, 30]. It is worth noting that the correction functional for a nonlinear vibration system is particularly well suited to dealing with initial conditions, but no effort has yet been made for nonlinear oscillators without initial conditions. Although the method was originally developed for the problems involving initial conditions, it also works in the case of boundary conditions [31, 32].

This article extends the variational iteration method [21] to a kind of special nonlinear oscillators with boundary conditions. We modify the correction functional to include two points instead of just one point, which was considered previously [21]. We construct a general nonlinear model of a vibrating system which, under certain assumptions, reduces to various problems such as the oscillatory motion of a bead in an arranged parabola, the vibration of a conical beam, the Mathews and Lakshmanan oscillator, etc. This modification in the variational iteration method is useful to obtain frequency-amplitude association as well as fairly accurate analytical solution of general nonlinear oscillatory system of these problems. We compare the results obtained



with this modification with the results obtained with the frequency formulation based on the energy balance method (FF-EBM) and numerical calculations to show the effectiveness and reliability of this modification. The rest of the paper is organized as follows:

In Section 2 of the paper, the fundamental concept of dual Lagrange multipliers for nonlinear oscillators is elucidated, laying the theoretical groundwork for the subsequent discussions. Moving to Section 3, the paper introduces and illustrates a novel technique applicable to a broad spectrum of oscillatory systems encountered in science and engineering. This methodology is then employed in three diverse examples showcased in the paper: firstly, the analysis of particle motion on a rotating parabola; secondly, the examination of a nonlinear oscillator pertinent to the construction industry; and finally, the application of the proposed technique to the Mathews-Lakshmanan nonlinear oscillator. Through these practical instances, the paper aims to demonstrate the versatility and efficacy of the introduced approach in tackling real-world problems across different domains.

2. Basic Idea of Dual Lagrange Multiplier for Nonlinear Oscillators

Generally, a nonlinear oscillator with displacement χ , time τ and amplitude a can be expressed as an initial problem:

$$\chi'' + f(\tau, \chi, \chi', \chi'') = 0, \quad \chi(0) = a, \quad \chi'(0) = 0 \tag{1}$$

where $(\bullet)'$ and $(\bullet)''$, respectively, represent the first and second order time derivatives. It is well known that for a conservative oscillator with unchanged amplitude a and period T , the following property holds:

$$\chi(0) = a, \quad \chi\left(\frac{T}{4}\right) = 0, \quad \chi\left(\frac{T}{2}\right) = -a, \quad \chi\left(\frac{3T}{4}\right) = 0, \quad \chi(T) = a \tag{2}$$

This is the main reason why we can change an initial value problem into a two-point problem. We can express Eq. (1) in the form:

$$\chi'' + \Omega^2 \chi + g(\tau, \chi, \chi', \chi'') = 0 \tag{3}$$

where $g(\tau, \chi, \chi', \chi'') = f(\tau, \chi, \chi', \chi'') - \Omega^2 \chi$ and Ω is the nonlinear frequency of oscillator to be determined.

For Eq. (3), the variational iteration algorithm can be considered as [18]:

$$\chi_{n+1}(\tau) = \chi_n(\tau) + \int_0^\tau \lambda(\xi, \tau) [\chi_n''(\xi) + \Omega^2 \chi_n(\xi) + g^-(\xi, \chi_n(\xi), \chi_n'(\xi), \chi_n''(\xi))] d\xi \tag{4}$$

where λ and g^- are, respectively, the Lagrange multiplier and the restricted variation. Also, n and $n + 1$, respectively, refer to the current and next iteration of the technique.

The starting approximate solution is:

$$\chi_0 = a \cos \Omega \tau \tag{5}$$

Now we consider the two-point boundary conditions:

$$\chi(\alpha) = A, \quad \chi(\beta) = B \tag{6}$$

The correction functional can be modified as:

$$\chi_{n+1}(\tau) = \chi_n(\tau) + \int_\alpha^\tau \lambda_1(\xi, \tau) [\chi_n''(\xi) + \Omega^2 \chi_n(\xi) + g^-(\xi, \chi_n(\xi), \chi_n'(\xi), \chi_n''(\xi))] d\xi + \int_\tau^\beta \lambda_2(\xi, \tau) [\chi_n''(\xi) + \Omega^2 \chi_n(\xi) + g^-(\xi, \chi_n(\xi), \chi_n'(\xi), \chi_n''(\xi))] d\xi \tag{7}$$

where $\lambda_1(\xi, \tau)$ and $\lambda_2(\xi, \tau)$ are Lagrange's multipliers described respectively on the intervals $[\alpha, \tau]$ and $[\tau, \beta]$. The initial term χ_0 is selected to comply with the criteria on both points $\tau = \alpha$ and $\tau = \beta$.

In order to elucidate the identification of the multipliers, we express Eq. (7) as:

$$\begin{aligned} \chi_{n+1}(\tau) = \chi_n(\tau) &+ \int_\alpha^\tau \lambda_1(\xi, \tau) \chi_n''(\xi) d\xi + \Omega^2 \int_\alpha^\tau \lambda_1(\xi, \tau) \chi_n(\xi) d\xi + \int_\alpha^\tau \lambda_1(\xi, \tau) g^-(\xi, \chi_n(\xi), \chi_n'(\xi), \chi_n''(\xi)) d\xi \\ &+ \int_\tau^\beta \lambda_2(\xi, \tau) \chi_n''(\xi) d\xi + \Omega^2 \int_\tau^\beta \lambda_2(\xi, \tau) \chi_n(\xi) d\xi + \int_\tau^\beta \lambda_2(\xi, \tau) g^-(\xi, \chi_n(\xi), \chi_n'(\xi), \chi_n''(\xi)) d\xi \end{aligned} \tag{8}$$

Integration by parts twice of the following terms yields:

$$\int_\alpha^\tau \lambda_1(\xi, \tau) \chi_n''(\xi) d\xi = \lambda_1(\tau, \tau) \chi_n'(\tau) - \lambda_1(\alpha, \tau) \chi_n'(\alpha) - \lambda_1'(\tau, \tau) \chi_n(\tau) + \lambda_1'(\alpha, \tau) \chi_n(\alpha) + \int_\alpha^\tau \lambda_1''(\xi, \tau) \chi_n(\xi) d\xi \tag{9}$$

$$\int_\tau^\beta \lambda_2(\xi, \tau) \chi_n''(\xi) d\xi = \lambda_2(\beta, \tau) \chi_n'(\beta) - \lambda_2(\tau, \tau) \chi_n'(\tau) - \lambda_2'(\beta, \tau) \chi_n(\beta) + \lambda_2'(\tau, \tau) \chi_n(\tau) + \int_\tau^\beta \lambda_2''(\xi, \tau) \chi_n(\xi) d\xi \tag{10}$$

After applying above relations in Eq. (8), we have:

$$\begin{aligned} \chi_{n+1}(\tau) = & [1 - \lambda_1'(\tau, \tau) + \lambda_1'(\tau, \tau)] \chi_n(\tau) + [\lambda_1(\tau, \tau) - \lambda_2(\tau, \tau)] \chi_n'(\tau) - \lambda_1(\alpha, \tau) \chi_n'(\alpha) + \lambda_1'(\alpha, \tau) \chi_n(\alpha) + \lambda_2(\beta, \tau) \chi_n'(\beta) - \lambda_2'(\beta, \tau) \chi_n(\beta) \\ & + \int_\alpha^\tau [\lambda_1''(\xi, \tau) + \Omega^2 \lambda_1(\xi, \tau)] \chi_n(\xi) d\xi + \int_\alpha^\tau \lambda_1(\xi, \tau) g^-(\xi, \chi_n(\xi), \chi_n'(\xi), \chi_n''(\xi)) d\xi \\ & + \int_\tau^\beta [\lambda_2''(\xi, \tau) + \Omega^2 \lambda_2(\xi, \tau)] \chi_n(\xi) d\xi + \int_\tau^\beta \lambda_2(\xi, \tau) g^-(\xi, \chi_n(\xi), \chi_n'(\xi), \chi_n''(\xi)) d\xi \end{aligned} \tag{11}$$



Considering the variation on both sides of Eq. (11) yields:

$$\delta\chi_{n+1}(\tau) = [1 - \lambda'_1(\tau, \tau) + \lambda'_2(\tau, \tau)]\delta\chi_n(\tau) + [\lambda_1(\tau, \tau) - \lambda_2(\tau, \tau)]\delta\chi'_n(\tau) + \delta\left(\int_{\alpha}^{\tau} [\lambda''_1(\xi, \tau) + \Omega^2\lambda_1(\xi, \tau)]\chi_n(\xi) d\xi\right) + \delta\left(\int_{\tau}^{\beta} [\lambda''_2(\xi, \tau) + \Omega^2\lambda_2(\xi, \tau)]\chi_n(\xi) d\xi\right) = 0 \tag{12}$$

Therefore, we have the following stationary conditions:

$$\begin{aligned} \lambda''_1(\xi, \tau) + \Omega^2\lambda_1(\xi, \tau) &= 0, & \alpha < \xi < \tau \\ \lambda''_2(\xi, \tau) + \Omega^2\lambda_2(\xi, \tau) &= 0, & \tau < \xi < \beta \\ 1 - \lambda'_1(\xi, \tau) + \lambda'_2(\xi, \tau)|_{\xi=\tau} &= 0, \\ \lambda_1(\xi, \tau) - \lambda_2(\xi, \tau)|_{\xi=\tau} &= 0. \end{aligned} \tag{13}$$

Upon solving Eq. (13), we have:

$$\begin{aligned} \lambda_1(\xi, \tau) &= \frac{\sin[\Omega(\beta - \tau)]\sin[\Omega(\alpha - \xi)]}{\Omega\sin[\Omega(\alpha - \beta)]}, & \alpha < \xi < \tau \\ \lambda_2(\xi, \tau) &= \frac{\sin[\Omega(\alpha - \tau)]\sin[\Omega(\beta - \xi)]}{\Omega\sin[\Omega(\alpha - \beta)]}, & \tau < \xi < \beta \end{aligned} \tag{14}$$

Hence, the VIM algorithm for the nonlinear oscillator with two-point boundary conditions is:

$$\begin{aligned} \chi_{n+1}(\tau) &= \chi_n(\tau) + \int_{\alpha}^{\tau} \frac{\sin[\Omega(\beta - \tau)]\sin[\Omega(\alpha - \xi)]}{\Omega\sin[\Omega(\alpha - \beta)]} [\chi''_n(\xi) + \Omega^2\chi_n(\xi) + g(\xi, \chi_n(\xi), \chi'_n(\xi), \chi''_n(\xi))] d\xi \\ &+ \int_{\tau}^{\beta} \frac{\sin[\Omega(\alpha - \tau)]\sin[\Omega(\beta - \xi)]}{\Omega\sin[\Omega(\alpha - \beta)]} [\chi''_n(\xi) + \Omega^2\chi_n(\xi) + g(\xi, \chi_n(\xi), \chi'_n(\xi), \chi''_n(\xi))] d\xi \end{aligned} \tag{15}$$

3. Applications

This section demonstrates the proposed technique for a general oscillatory system that describes various problems, such as the cubic duffing equation, the cubic-quintic duffing equation, the oscillatory motion of a bead in an arranged parabola, the vibration of a conical beam, the Mathews and Lakshmanan oscillator, etc. arising in science and engineering [30, 33-35] to show its reliability and validity. Consider this general equation as:

$$\chi'' + \frac{\kappa\chi + \gamma_1\chi\chi'^2 + \gamma_2\chi^3\chi'^2 + \gamma_3\chi^3 + \gamma_4\chi^5}{1 + \eta_1\chi^2 + \eta_2\chi^4} = 0 \tag{16}$$

where $\kappa, \gamma_1, \gamma_2, \gamma_3, \gamma_4, \eta_1$ and η_2 are arbitrary parameters. Equation (16) can be expressed as:

$$\chi'' + \Omega^2\chi + (\kappa - \Omega^2)\chi + \gamma_1\chi\chi'^2 + \gamma_2\chi^3\chi'^2 + \gamma_3\chi^3 + \gamma_4\chi^5 + \eta_1\chi^2\chi'' + \eta_2\chi^4\chi'' = 0 \tag{17}$$

Using Eq. (2) for two-points as 0 and $T/4$, the iteration formula for Eq. (17) by employing Eq. (15) can be represented as:

$$\begin{aligned} \chi_{n+1}(\tau) &= \chi_n(\tau) + \frac{\cos\Omega\tau}{\Omega} \int_0^{\tau} \sin\Omega\xi [\chi''_n(\xi) + \kappa\chi_n(\xi) + \gamma_1\chi_n(\xi)\chi_n'^2(\xi) + \gamma_2\chi_n^3(\xi)\chi_n'^2(\xi)] d\xi \\ &+ \frac{\cos\Omega\tau}{\Omega} \int_0^{\tau} \sin\Omega\xi [\gamma_3\chi_n^3(\xi) + \gamma_4\chi_n^5(\xi) + \eta_1\chi_n^2(\xi)\chi_n''(\xi) + \eta_2\chi_n^4(\xi)\chi_n''(\xi)] d\xi \\ &+ \frac{\sin\Omega\tau}{\Omega} \int_{\tau}^{T/4} \cos\Omega\xi [\chi''_n(\xi) + \kappa\chi_n(\xi) + \gamma_1\chi_n(\xi)\chi_n'^2(\xi) + \gamma_2\chi_n^3(\xi)\chi_n'^2(\xi)] d\xi \\ &+ \frac{\sin\Omega\tau}{\Omega} \int_{\tau}^{T/4} \cos\Omega\xi [\gamma_3\chi_n^3(\xi) + \gamma_4\chi_n^5(\xi) + \eta_1\chi_n^2(\xi)\chi_n''(\xi) + \eta_2\chi_n^4(\xi)\chi_n''(\xi)] d\xi \end{aligned} \tag{18}$$

The initial solution is chosen as $\chi_0 = a\cos\Omega\tau$, by Eq. (18) we obtain:

$$\begin{aligned} \chi_1(\tau) &= a\cos\Omega\tau + \frac{\cos\Omega\tau}{\Omega} \int_0^{\tau} \sin\Omega\xi [(-a\Omega^2 + \kappa a + \gamma_1 a^3\Omega^2)\cos\Omega\xi] d\xi \\ &+ \frac{\cos\Omega\tau}{\Omega} \int_0^{\tau} \sin\Omega\xi [(-\gamma_1 a^3\Omega^2 + \gamma_2 a^5\Omega^2 + \gamma_3 a^3 - \eta_1 a^3\Omega^2)\cos^3\Omega\xi] d\xi \\ &+ \frac{\cos\Omega\tau}{\Omega} \int_0^{\tau} \sin\Omega\xi [(-\gamma_2 a^5\Omega^2 + \gamma_4 a^5 - \eta_2 a^5\Omega^2)\cos^5\Omega\xi] d\xi \\ &+ \frac{\sin\Omega\tau}{\Omega} \int_{\tau}^{T/4} \cos\Omega\xi [(-a\Omega^2 + \kappa a + \gamma_1 a^3\Omega^2)\cos\Omega\xi] d\xi \\ &+ \frac{\sin\Omega\tau}{\Omega} \int_{\tau}^{T/4} \cos\Omega\xi [(-\gamma_1 a^3\Omega^2 + \gamma_2 a^5\Omega^2 + \gamma_3 a^3 - \eta_1 a^3\Omega^2)\cos^3\Omega\xi] d\xi \\ &+ \frac{\sin\Omega\tau}{\Omega} \int_{\tau}^{T/4} \cos\Omega\xi [(-\gamma_2 a^5\Omega^2 + \gamma_4 a^5 - \eta_2 a^5\Omega^2)\cos^5\Omega\xi] d\xi \end{aligned}$$



After simplification, we have:

$$\chi_1(t) = a \cos \Omega \tau + \frac{\cos \Omega \tau}{\Omega} \int_0^\tau \sin \Omega \xi [\Lambda_1 \cos \Omega \xi + \Lambda_2 \cos 3 \Omega \xi + \Lambda_3 \cos 5 \Omega \xi] d\xi + \frac{\sin \Omega \tau}{\Omega} \int_0^\tau \cos \Omega \xi [\Lambda_1 \cos \Omega \xi + \Lambda_2 \cos 3 \Omega \xi + \Lambda_3 \cos 5 \Omega \xi] d\xi \quad (19)$$

where,

$$\Lambda_1 = -a \Omega^2 + \kappa a + \frac{\gamma_1 a^3 \Omega^2}{4} + \frac{\gamma_2 a^5 \Omega^2}{8} + \frac{3 \gamma_3 a^3}{4} + \frac{5 \gamma_4 a^5}{8} - \frac{3 \eta_1 a^3 \Omega^2}{4} - \frac{5 \eta_2 a^5 \Omega^2}{8} \quad (20)$$

$$\Lambda_2 = -\frac{\gamma_1 a^3 \Omega^2}{4} - \frac{\gamma_2 a^5 \Omega^2}{16} + \frac{\gamma_3 a^3}{4} + \frac{5 \gamma_4 a^5}{16} - \frac{\eta_1 a^3 \Omega^2}{4} - \frac{5 \eta_2 a^5 \Omega^2}{16} \quad (21)$$

and,

$$\Lambda_3 = \frac{1}{16} (-\gamma_2 a^5 \Omega^2 + \gamma_4 a^5 - \eta_2 a^5 \Omega^2) \quad (22)$$

Upon integration of Eq. (19), we have:

$$\begin{aligned} \chi_1(t) = a \cos \Omega \tau - \frac{\cos \Omega \tau}{\Omega^2} \left[\Lambda_1 \left(-\frac{1}{4} - \frac{\cos 2 \Omega \xi}{4} \right) + \Lambda_2 \left(\frac{\cos 2 \Omega \xi}{4} - \frac{\cos 4 \Omega \xi}{8} \right) + \Lambda_3 \left(\frac{\cos 4 \Omega \xi}{8} - \frac{\cos 6 \Omega \xi}{12} \right) \right] \Bigg|_0^\tau \\ + \frac{\sin \Omega \tau}{\Omega^2} \left[\Lambda_1 \left(\frac{\Omega \xi}{2} + \frac{\sin 2 \Omega \xi}{4} \right) + \Lambda_2 \left(\frac{\sin 2 \Omega \xi}{4} + \frac{\sin 4 \Omega \xi}{8} \right) + \Lambda_3 \left(\frac{\sin 4 \Omega \xi}{8} + \frac{\sin 6 \Omega \xi}{12} \right) \right] \Bigg|_0^\tau \end{aligned} \quad (23)$$

After simple calculation, we obtain:

$$\begin{aligned} \chi_1(\tau) = a \cos \Omega \tau + \frac{\cos \Omega \tau}{\Omega^2} \left[\frac{\Lambda_1}{4} + \left(-\frac{\Lambda_1}{4} + \frac{\Lambda_2}{4} \right) \cos 2 \Omega \tau + \left(-\frac{\Lambda_2}{8} + \frac{\Lambda_3}{8} \right) \cos 4 \Omega \tau - \frac{\Lambda_3}{12} \cos 6 \Omega \tau - \left(\frac{\Lambda_2}{8} + \frac{\Lambda_3}{24} \right) \right] \\ + \frac{\sin \Omega \tau}{\Omega^2} \left[\frac{\Lambda_1 \pi}{4} - \frac{\Lambda_1 \Omega \tau}{2} - \left(\frac{\Lambda_1}{4} + \frac{\Lambda_2}{4} \right) \sin 2 \Omega \tau - \left(\frac{\Lambda_2}{8} + \frac{\Lambda_3}{8} \right) \sin 4 \Omega \tau - \frac{\Lambda_3}{12} \sin 6 \Omega \tau \right] \end{aligned} \quad (24)$$

Using simple trigonometric identities, we have:

$$\chi_1(\tau) = a \cos \Omega \tau + \frac{1}{\Omega^2} \left[\left(-\frac{\Lambda_2}{8} - \frac{\Lambda_3}{24} \right) \cos \Omega \tau + \frac{\Lambda_2}{8} \cos 3 \Omega \tau + \frac{\Lambda_3}{24} \cos 5 \Omega \tau + \frac{\Lambda_1 \pi}{4} \sin \Omega \tau - \frac{\Lambda_1 \Omega}{2} \tau \sin \Omega \tau \right] \quad (25)$$

In order to maintain the oscillatory behavior, no secular term [21] appears. Therefore:

$$\Lambda_1 = 0 \quad (26)$$

Using Eq. (20), we have:

$$-a \Omega^2 + \kappa a + \frac{\gamma_1 a^3 \Omega^2}{4} + \frac{\gamma_2 a^5 \Omega^2}{8} + \frac{3 \gamma_3 a^3}{4} + \frac{5 \gamma_4 a^5}{8} - \frac{3 \eta_1 a^3 \Omega^2}{4} - \frac{5 \eta_2 a^5 \Omega^2}{8} = 0$$

which provides the following result:

$$\Omega = \sqrt{\frac{8 \kappa + 6 \gamma_3 a^2 + 5 \gamma_4 a^4}{8 - 2 \gamma_1 a^2 - \gamma_2 a^4 + 6 \eta_1 a^2 + 5 \eta_2 a^4}} \quad (27)$$

Thus, approximate solution of Eq. (16) from Eq. (25) as:

$$\chi_{GVIM} = a \cos \Omega \tau - \frac{\Lambda_2}{8 \Omega^2} (\cos \Omega \tau - \cos 3 \Omega \tau) - \frac{\Lambda_3}{24 \Omega^2} (\cos \Omega \tau - \cos 5 \Omega \tau)$$

or,

$$\begin{aligned} \chi_{GVIM} = a \cos \Omega \tau + \frac{1}{8 \Omega^2} \left[\frac{1}{4} (\gamma_1 + \eta_1) a^3 \Omega^2 + \frac{1}{16} (\gamma_2 + 5 \eta_2) a^5 \Omega^2 - \frac{1}{4} \gamma_3 a^3 - \frac{5}{16} \gamma_4 a^5 \right] (\cos \Omega \tau - \cos 3 \Omega \tau) \\ + \frac{1}{24 \Omega^2} \left[\frac{1}{16} (\gamma_2 + \eta_2) a^5 \Omega^2 - \frac{1}{16} \gamma_4 a^5 \right] (\cos \Omega \tau - \cos 5 \Omega \tau) \end{aligned} \quad (28)$$

The methodology described above is now going to be applied to the following three examples.

3.1. Example I: Movement of a particle on a rotating parabola

By setting the parameters $\kappa = \Omega_0^2$, $\gamma_1 = 4 \varepsilon^2$, $\gamma_2 = \gamma_3 = \gamma_4 = 0$, $\eta_1 = 4 \varepsilon^2$ and $\eta_2 = 0$ of general oscillatory Eq. (16), we have the equation of motion of the vibration of a particle moving freely down a parabola [36, 37]:

$$\chi'' + \frac{\Omega_0^2 + 4 \varepsilon^2 \chi \chi'^2}{1 + 4 \varepsilon^2 \chi^2} = 0 \quad (29)$$

Equation (29) also characterizes the motion of the double slider mechanism [34]. The solution of Eq. (29) can be seen from the frequency formulation [38] and the FF-EBM [19]. By substituting the above parameters in Eq. (27), the expression for the angular frequency of the oscillator can be obtained as:



$$\Omega = \frac{\Omega_0}{\sqrt{1 + 2\varepsilon^2 a^2}} \tag{30}$$

which is exactly identical to that given in [19, 37]. Equation (28) can be obtained analytically the approximate solution of Eq. (29) as:

$$\chi_{GVIM} = a \cos \Omega \tau + \frac{\varepsilon^2 a^3}{4} (\cos \Omega \tau - \cos 3\Omega \tau) \tag{31}$$

The approximate solution due to [19] is:

$$\chi_{FF-EBM} = a \cos \left(\frac{\Omega_0}{\sqrt{1 + 2\varepsilon^2 a^2}} \tau \right) \tag{32}$$

Figure 1 shows the results gained from the modification in VIM, Runge-Kutta (RK) method of order 4 using MATLAB and frequency formulation followed by energy balance method [19]. Three set of parameters $A(\Omega_0 = 0.5, \varepsilon = 0.5, a = 0.8)$ in the top panel, $B(\Omega_0 = 0.8, \varepsilon = 0.5, a = 0.5)$ in the middle panel and $C(\Omega_0 = 0.8, \varepsilon = 0.5, a = 0.5)$ in the bottom panel are considered for this oscillator.

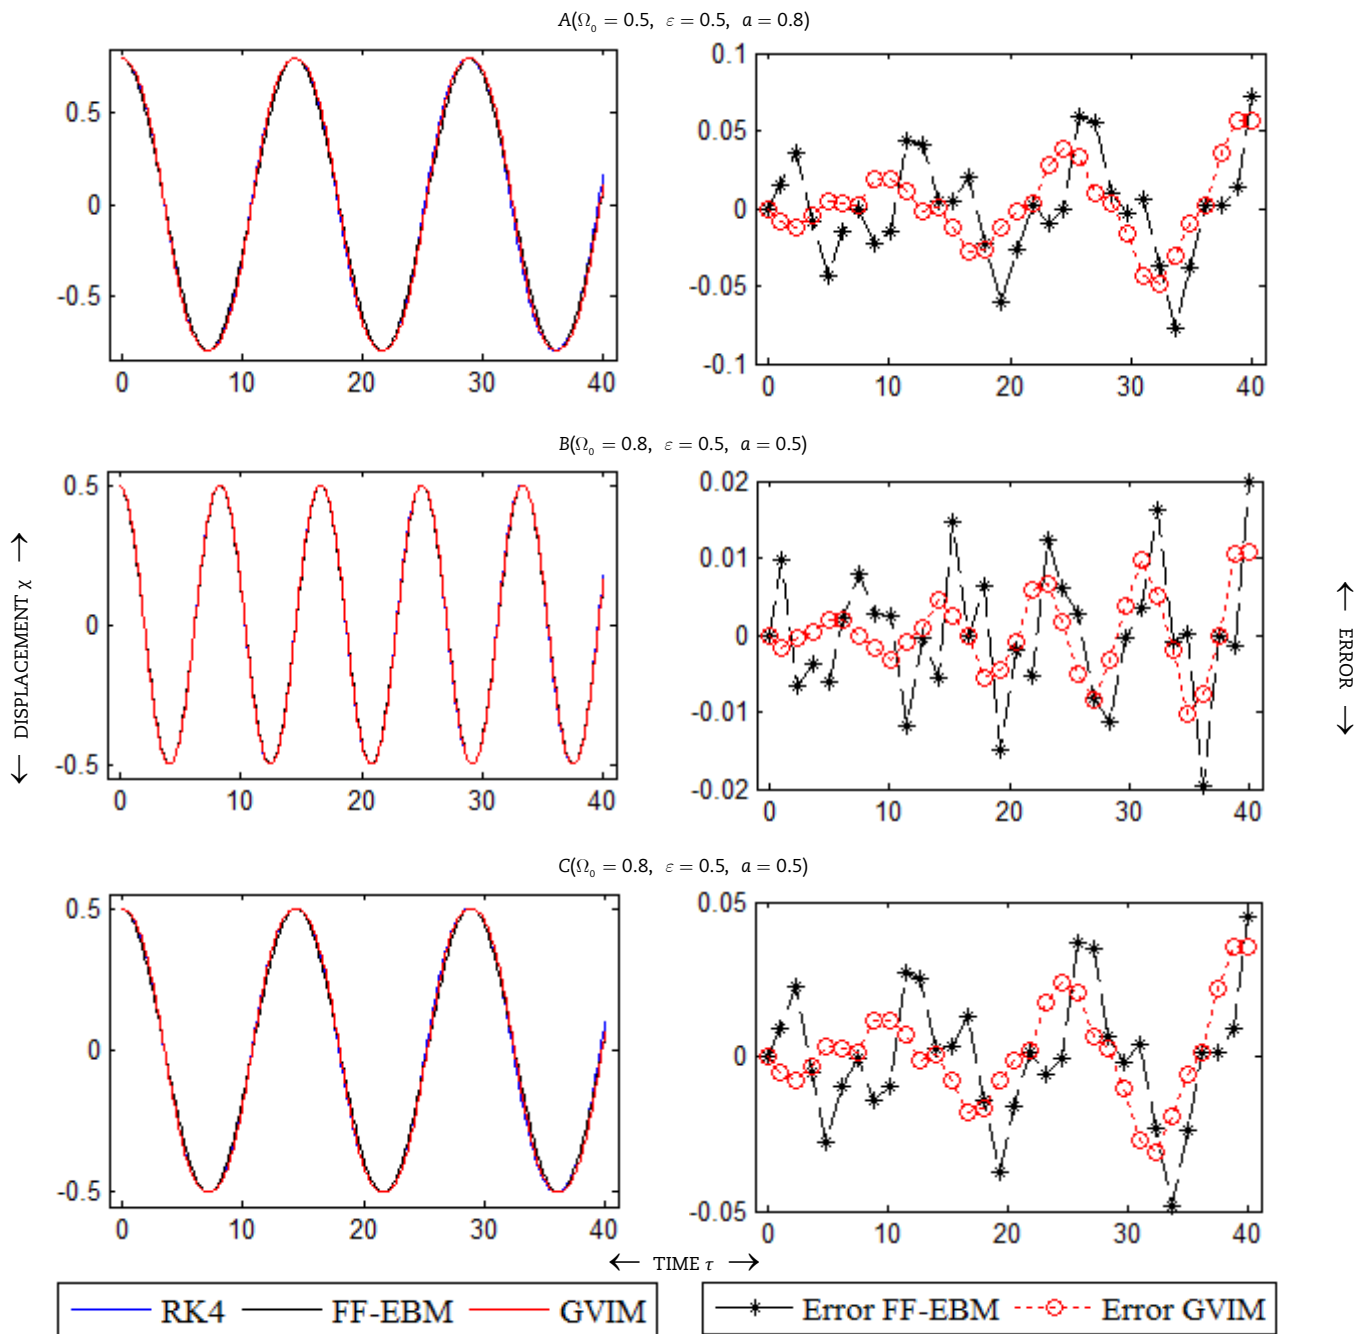


Fig. 1. Comparison of displacement and errors for Eq. (29).



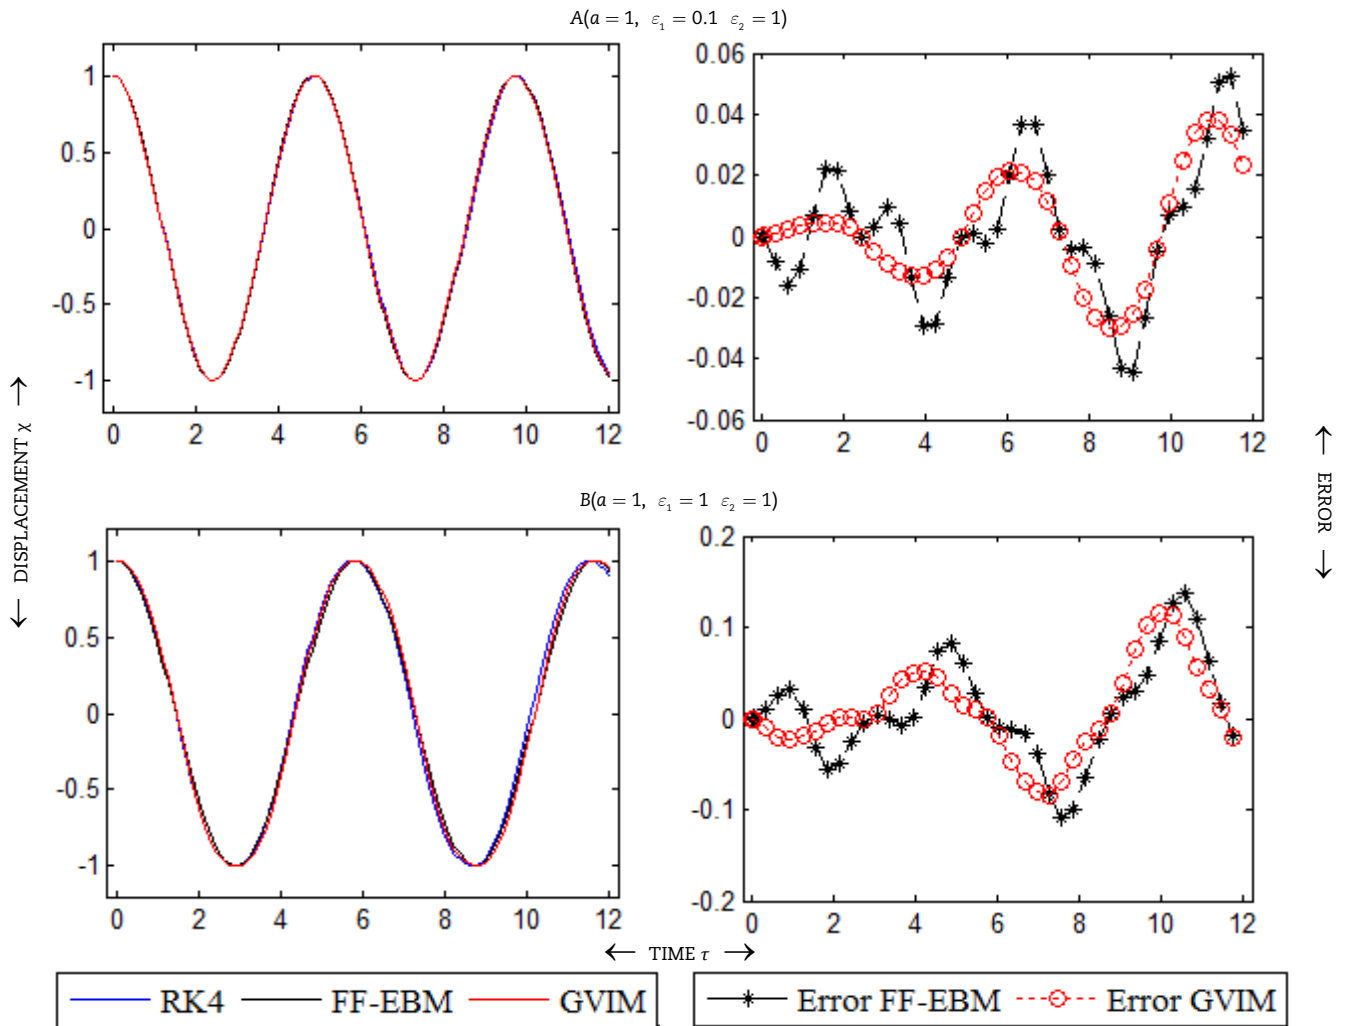


Fig. 2. Comparison of displacement and errors for Eq. (33).

The left column shows displacement obtained from RK method (blue line), Eq. (32) (black line) and Eq. (31) (red line) for above mentioned parameters and this comparison authenticates the modification in the correction functional because the approximate analytical results from Eq. (31) using proposed technique match remarkably well with the numerical results of RK method. For the same parameter values, we also display errors, ϵ_{GVIM} ($= \chi_{RK4} - \chi_{GVIM}$, red circles with dotted line) and ϵ_{FF-EBM} ($= \chi_{RK4} - \chi_{FF-EBM}$, black asterisks with solid line) against time in the right column of Figure 1. Both approximate solutions Eq. (31) and Eq. (32) have small errors but all right-side panels ensure the accuracy of the proposed modification when compare with energy balance method [19].

3.2. Example II: Nonlinear oscillator from construction industry

Considering the forced parameters $\kappa = 1, \gamma_1 = \epsilon_1, \gamma_2 = 0, \gamma_3 = \epsilon_2, \gamma_4 = 0, \eta_1 = \epsilon_1$ and $\eta_2 = 0$ of general Eq. (16), we have the equation [39-40]:

$$\chi'' + \frac{\chi + \epsilon_1 \chi \chi'^2 + \epsilon_2 \chi^3}{1 + \epsilon_1 \chi^2} = 0 \tag{33}$$

Equation (33) represents model of tapered beam used in construction industry [39-40]. The angular frequency for this oscillator using Eq. (27) is:

$$\Omega = \sqrt{\frac{4 + 3\epsilon_2 a^2}{4 + 2\epsilon_1 a^2}} \tag{34}$$

which is perfect match with given by [19]. The approximate analytical solution using Eq. (28) is:

$$\chi_{GVIM} = a \cos \Omega \tau + \frac{1}{8\Omega^2} \left[\frac{1}{2} \epsilon_1 a^3 \Omega^2 - \frac{1}{4} \epsilon_2 a^3 \right] (\cos \Omega \tau - \cos 3\Omega \tau) \tag{35}$$

whereas the solution given by FF-EBM [19] is:

$$\chi_{FF-EBM} = a \cos \left(\sqrt{\frac{4 + 3\epsilon_2 a^2}{4 + 2\epsilon_1 a^2}} \tau \right) \tag{36}$$



The variation in displacement and their corresponding errors are plotted in Fig. 2 for tapered beam. Displacement yielded from RK method using MATLAB χ_{RK4} (blue line), Eq. (35) χ_{GVIM} (red line) and Eq. (36) χ_{FF-EBM} (black line) against time τ for two parameters $A(a=1, \varepsilon_1=0.1, \varepsilon_2=1)$ in the top left panel, and $B(a=1, \varepsilon_1=1, \varepsilon_2=1)$ in the left bottom panel ensures the efficiency of the proposed modification. $\varepsilon_{GVIM} (= \chi_{RK4} - \chi_{GVIM})$, red circles with dotted line) and $\varepsilon_{FF-EBM} (= \chi_{RK4} - \chi_{FF-EBM})$, black asterisks with solid line) with time τ for the similar parameters in the right column concludes that the proposed strategy is better than energy balance method.

3.3. Example III: Mathews and Lakshmanan nonlinear oscillator

Mathews-Lakshmanan nonlinear oscillator [41] can be gained from general oscillatory Eq. (16) by setting the values of the parameters $\kappa = \alpha^2, \gamma_1 = \pm k, \gamma_2 = \gamma_3 = \gamma_4 = 0, \eta_1 = \pm k$ and $\eta_2 = 0$,

$$\chi'' + \frac{\alpha^2 \chi \pm k \chi^2}{1 \pm k \chi^2} = 0 \tag{37}$$

Equation (37) plays significant role in elementary particle theory and the Lagrangian minimum density for relativity scalar field [41] can be used to model it. The angular frequency of Eq. (37) can be yielded using Eq. (27) by applying aforementioned parameters as:

$$\Omega = \frac{\alpha}{\sqrt{1 \pm ka^2}} \tag{38}$$

Using Eq. (28) the analytic solution of Eq. (37) is:

$$\chi_{GVIM} = a \cos \left[\frac{\alpha \tau}{\sqrt{1 \pm ka^2}} \right] \tag{39}$$

Equations (38) and (39) are, respectively, the exact nonlinear frequency and analytic solution of the Mathews-Lakshmanan oscillator.

4. Conclusion

This paper introduced a novel extension of the variational iteration method (VIM) to address nonlinear oscillators with boundary conditions. It tackled the dynamics of oscillatory systems marked by generalization, simplifying them into equations with significant nonlinearity. Examples included the motion of a bead in a rotating parabola, the large oscillation of a conical beam, and the Mathews-Lakshmanan oscillator. Through a modified correction functional, considering two points instead of the previously explored single point, the study successfully obtained the approximate analytic solutions and established the frequency-amplitude relationship for the general oscillatory problem and its associated systems. The proposed modification yields rapidly converging solutions, where even a first-order approximation proves sufficient to achieve highly accurate results. The examples showed that the modification is reliable. Consequently, this technique can be used to solve other nonlinear oscillatory problems. It is also extensible to nonlinear oscillators with fractional and/or fractal derivatives.

Author Contributions

All authors contribute equally in preparation of this manuscript. All authors discussed the results, reviewed, and approved the final version of the manuscript.

Acknowledgments

We acknowledge all referees for their comments and suggestions for the improvement of the quality of the manuscript.

Conflict of Interest

The authors declared no potential conflicts of interest with respect to the research, authorship, and publication of this article.

Funding

The authors received no financial support for the research, authorship, and publication of this article.

Data Availability Statements

Not applicable.

Nomenclature


A	Amplitude of the oscillator	γ_2	Coefficient of nonlinear term
T	Time period	γ_3	Cubic power coefficient
χ	Approximate solution	γ_4	Quintic power coefficient
τ	Time	η_1	Quadratic nonlinearity coefficient
κ	Coefficient of linear term	η_2	Quatral nonlinearity coefficient
γ_1	Coefficient of nonlinear term	Ω	Nonlinear frequency of the oscillator




References

- [1] Milic, P., Marinkovic, D., Klinge, S., Cojbašić, Ž., Reissner-Mindlin Based Isogeometric Finite Element Formulation for Piezoelectric Active Laminated Shells, *Tehnicki Vjesnik*, 30(2), 2020, 416-425,
- [2] Rama, G., Marinkovic, D., Zehn, M., High performance 3-node shell element for linear and geometrically nonlinear analysis of composite laminates, *Composites Part B: Engineering*, 151, 2018, 118-126,
- [3] Mitrev, R., Janošević, D., Marinkovic, D., Dynamical modelling of hydraulic excavator considered as a multibody system, *Tehnicki Vjesnik*, 24, 2017, 327-338.
- [4] Yau, H.T., Kuo, P.H., Luan, P.C., Tseng, Y.R., Proximal policy optimization-based controller for chaotic systems, *International Journal of Robust and Nonlinear Control*, 34(1), 2024, 586-601.
- [5] Kuo, P.H., Chang, C.W., Tseng, Y.R., Yau, H.T., Efficient, automatic, and optimized portable Raman-spectrum-based pesticide detection system, *Spectrochimica Acta Part A: Molecular and Biomolecular Spectroscopy*, 308, 2024, 123787.
- [6] Rabiee, F., Jafari, A.A., Nonlinear forced vibration of rectangular plates by modified multiple scale method, *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*, 236(9), 2022, 21-30.
- [7] Li, X., Wang, D., Saeed, T., Multi-scale numerical approach to the polymer filling process in the weld line region, *Facta Universitatis, Series: Mechanical Engineering*, 20(2), 2022, 363-380.
- [8] Tao, Z.L., Chen, G.H., An effective modification of Ji-Huan He's variational approach to nonlinear singular oscillator, *Journal of Low Frequency Noise, Vibration and Active Control*, 38(3-4), 2019, 1023-1027.
- [9] Koochi, A., Abadyan, M., *Nonlinear Differential Equations in Micro/Nano Mechanics: Application in Micro/Nano Structures and Electromechanical Systems*, Elsevier, 2020.
- [10] Arif, M.S., Nawaz, Y., Bibi, M., Fayyaz, R., Naz, M., A modification of He's variational approach using the least square method to nonlinear oscillators, *Journal of Low Frequency Noise, Vibration and Active Control*, 38(3-4), 2019, 996-1007.
- [11] Anjum, N., He, J.H., Ain, Q.T., Tian, D., Li-He's modified homotopy perturbation method for doubly-clamped electrically actuated microbeams-based microelectromechanical system, *Facta Universitatis, Series: Mechanical Engineering*, 19(4), 2021, 01-12.
- [12] He, C.H., Amer, T.S., Tian, D., Abolila, A.F., Galal, A.A., Controlling the kinematics of a spring-pendulum system using an energy harvesting device, *Journal of Low Frequency Noise, Vibration and Active Control*, 41(3), 2022, 34-57.
- [13] He, C.H., El-Dib, Y.O., A heuristic review on the homotopy perturbation method for non-conservative oscillators, *Journal of Low Frequency Noise, Vibration and Active Control*, 41(2), 2022, 572-603.
- [14] He, C.H., Tian, D., Moatimid, G.M., Salman, H.F., Zekry, M.H., Hybrid Rayleigh-van der pol-duffing oscillator: stability analysis and controller, *Journal of Low Frequency Noise, Vibration and Active Control*, 41(1), 2022, 44-68.
- [15] He, J.H., Verma, L., Pandit, B., Verma, A.K., Agarwal, R.P., A new Taylor series based numerical method: Simple, reliable, and promising, *Journal of Applied and Computational Mechanics*, 9(4), 2023, 22-34.
- [16] Lin, M.X., Deng, C.Y., Chen, C.O.K., Free vibration analysis of non-uniform Bernoulli beam by using Laplace Adomian decomposition method, *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*, 236(13), 2022, 68-78.
- [17] Mehdi-pour, I., Ganji, D.D., Mozaffari, M., Application of the energy balance method to nonlinear vibrating equations, *Current Applied Physics*, 10(1), 2010, 104-112.
- [18] El-Dib, Y.O., Insightful and comprehensive formulation of frequency-amplitude formula for strong or singular nonlinear oscillators, *Journal of Low Frequency Noise, Vibration and Active Control*, 42(1), 2023, 89-109.
- [19] Nofal, T.A., Ismail, G.M., Mady, A.A.M., Abdel-Khalek, S., Analytical and approximate solutions to the free vibration of strongly nonlinear oscillators, *Journal of Electromagnetic Analysis and Applications*, 5(10), 2013, 88-92.
- [20] Ma, H., Simplified Hamiltonian-based frequency-amplitude formulation for nonlinear vibration systems, *Facta Universitatis, Series: Mechanical Engineering*, 20(2), 2022, 445-455.
- [21] He, J.H., Variational iteration method—a kind of non-linear analytical technique: some examples, *International Journal of Non-linear Mechanics*, 34(4), 1999, 699-708.
- [22] Anjum, N., He, J.H., He, C.H., Ashiq, A., A Brief Review on the Asymptotic Methods for the Periodic Behaviour of Microelectromechanical Systems, *Journal of Applied and Computational Mechanics*, 8(3), 2022, 20-40.
- [23] Farrokhhabadi, A., Koochi, A., Kazemi, A., Abadyan, M., Effects of size-dependent elasticity on stability of nanotweezers, *Applied Mathematics and Mechanics*, 35, 2014, 1573-1590.
- [24] Wu, G.C., Baleanu, D., Deng, Z.G., Variational iteration method as a kernel constructive technique, *Applied Mathematical Modelling*, 39(15), 2015, 78-84.
- [25] Wang, Y.H., Wu, G.C., Baleanu, D., Variational iteration method—a promising technique for constructing equivalent integral equations of fractional order, *Open Physics*, 11(10), 2013, 92-98.
- [26] Farrokhhabadi, A., Mokhtari, J., Koochi, A. et al., A theoretical model for investigating the effect of vacuum fluctuations on the electromechanical stability of nanotweezers, *Indian Journal of Physics*, 89, 2015, 599-609.
- [27] Ramos, J.I., On the variational iteration method and other iterative techniques for nonlinear differential equations, *Applied Mathematics and Computation*, 199(1), 2008, 39-69.
- [28] Dogan, D.D., Konuralp, A., Fractional variational iteration method for time-fractional non-linear functional partial differential equation having proportional delays, *Thermal Science*, 22(1), 2018, 33-46.
- [29] He, C.H., Liu, C., Variational principle for singular waves, *Chaos, Solitons and Fractals*, 172, 2023, 113566.
- [30] He, C.H., A variational principle for a fractal nano/microelectromechanical (N/MEMS) system, *International Journal of Numerical Methods for Heat and Fluid Flow*, 33(1), 2022, 351-359.
- [31] Khuri, S.A., Sayfy, A., Generalizing the variational iteration method for BVPs: proper setting of the correction functional, *Applied Mathematics Letters*, 68, 2017, 68-75.
- [32] Khuri, S.A., Sayfy, A., Variational iteration method: Green's functions and fixed point iterations perspective, *Applied Mathematics Letters*, 32, 2014, 28-34.
- [33] Tian, D., Ain, Q.T., Anjum, N., He, C.H., Cheng, B., Fractal N/MEMS: from pull-in instability to pull-in stability, *Fractals*, 29(2), 2021, 1-8.
- [34] Tian, D., He, C.H., A fractal micro-electromechanical system and its pull-in stability, *Journal of Low Frequency Noise, Vibration and Active Control*, 40(3), 2021, 80-86.
- [35] He, J.H., Anjum, N., Skrzypacz, P.S., A Variational Principle for a Nonlinear Oscillator Arising in the Microelectromechanical System, *Journal of Applied and Computational Mechanics*, 7(1), 2021, 78-83.
- [36] Marinca, V., Herisanu, N., Determination of periodic solutions for the motion of a particle on a rotating parabola by means of the optimal homotopy asymptotic method, *Journal of Sound and Vibration*, 329(9), 2010, 50-59.
- [37] Ganji, D.D., Azimi, M., Mostofi, M., Energy balance method and amplitude frequency formulation simulation of strongly non-linear oscillators, *Indian Journal of Pure and Applied Physics*, 50, 2012, 70-75.
- [38] Davodi, A.G., Ganji, D.D., Azami, R., Babazadeh, H., Application of improved amplitude-frequency formulation to nonlinear differential equation of motion equations, *Modern Physics Letters B*, 23(28), 2009, 27-36.
- [39] Billington, D.P., *The tower and the bridge: the new art of structural engineering*, Princeton University Press, 1985.
- [40] Akbarzade, M., Khan, Y., Dynamic model of large amplitude non-linear oscillations arising in the structural engineering: analytical solutions, *Mathematical and Computer Modelling*, 55(3-4), 2012, 80-89.
- [41] Mathews, P.M., Lakshmanan, M., On a unique nonlinear oscillator, *Quarterly of Applied Mathematics*, 32(2), 1974, 15-18.

ORCID iD

Naveed Anjum  <https://orcid.org/0000-0001-7810-7877>

Ji-Huan He  <https://orcid.org/0000-0002-1636-0559>





© 2024 Shahid Chamran University of Ahvaz, Ahvaz, Iran. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution-NonCommercial 4.0 International (CC BY-NC 4.0 license) (<http://creativecommons.org/licenses/by-nc/4.0/>).

How to cite this article: Anjum N., He J.H. A Dual Lagrange Multiplier Approach for the Dynamics of the Mechanical Vibrations, *J. Appl. Comput. Mech.*, 10(3), 2024, 643–651. <https://doi.org/10.22055/jacm.2024.45944.4439>

Publisher's Note Shahid Chamran University of Ahvaz remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

